

WW-4162, LTE WWAN Mini PCIe Card w/ RS232/GNSS Options

Overview

WW-4162 4G PCI Express Mini Card supports the latest 4G LTE with seamless fallback to 3G networks.

It is designed based on Gemalto/Cinterion LTE Cat1 and 3G HSPA wireless WAN technologies. Not only exhibits excellent hardware/radio frequency performance, it also supports rich software for fast product development. Following the PCI Express Mini Card standard, it could be easily applied in devices with PC architecture.

It is an ideal solution for the vast number of M2M and industrial IoT applications that are not dependent on speed but that requires the longevity of LTE networks, while still providing 3G connectivity to ensure complete population and geographic coverage as LTE rolls out.

In addition to WWAN, features of (a) ultra-sensitive GNSS (GPS & GLONASS), (b) SIM card holder, and (c) modem control via UART TTL/RS232 are available for increasing your product value in just one card.

Applications

- Smart grid / IoT
- POS / Automatic Meter Reading
- School Bus / Transit / Taxi / Police
- Tracking & Tracing / Fleets Management
- Industrial PC / Netbook PC / Tablet PC / SBC
- Mobile Internet Terminal / Fixed Wireless Terminal
- Kiosk /Digital Signage / Intelligent Vending Machine
- Financial / Security / Payment / Inventory / Healthcare
- Remote Monitoring / Telematics / mHealth

RoHS
Compliant



Features

- Both 4G LTE and 3G UMTS/WCDMA/HSPA support.
- PCI Express Mini Card standard V1.2 compliant
 - Communication via USB
 - Network status indication
 - Airplane mode support
 - Remote host wakeup support
- Powered by **Gemalto LTE Cat 1** module
 - ELS61-US (4G LTE bands 2,4,5,12; 3G bands 2,4,5)
 - Approvals
 - ◆ Canada Government IC
 - ◆ USA FCC/IC/PTCRB/UL Gov.
 - ◆ USA AT&T
- USB 2.0 High Speed (480Mbit/s) device interface, Full Speed (12Mbit/s) compliant
- Onboard SIM card holder (for Micro-SIM)
- Customer IMEI/SIM-Lock as variant
- RLS Monitoring (Jamming detection)
- Rich driver/RIL support for various platforms
- Rich internet communication protocol support
- Embedded IP stack with IPv4/ IPv6 support
- Internet Services TCP/UDP server/client, DNS, Ping, HTTP, SMTP, FTP client
- The latest TLS/SSL engine provides secure and reliable TCP/IP connectivity.
- **eSIM** support, BIP (Bearer Independent Protocol)
- SIM Access Profile (SAP)
- Abnormal temperature protection of module board (out

Navisys Technology Corp.

Tel : +886-3-5632598

Sales contact: sales@navisys.com.tw

Address: 2F, No.56, Park Ave. II, Science-Based Industrial Park, Hsinchu 300, Taiwan (R.O.C.)

<http://www.navisys.com.tw/>

Fax: +886-3-5632597

Technical support: service@navisys.com.tw

of -40~90°C)

- Option of UART TTL or RS232 modem control
- Option of high performance GNSS (GPS&GLONASS)
 - GNSS antenna short circuit protection
- Industrial grade operating temperature

Technical Specifications

Wireless WAN

Frequency bands	4G LTE Bands 2,4,5,12; 3G Bands 2,4,5 1900/1700(AWS)/850/700MHz (4G) 1900/1700(AWS)/850MHz (3G)
Output power	Class 3, WCDMA, FDD (Release 99) <ul style="list-style-type: none"> ● (+24dBm +1/-3dB) for UMTS 1900, B2 ● (+24dBm +1/-3dB) for UMTS AWS, B4 ● (+24dBm +1/-3dB) for UMTS 850, B5 Class 3, LTE, FDD (Release 8) <ul style="list-style-type: none"> ● (+23dBm +/-2dB) for LTE 1900, LTE FDD B2 ● (+23dBm +/-2dB) for LTE AWS, LTE FDD B4 ● (+23dBm +/-2dB) for LTE 850, LTE FDD B5 ● (+23dBm +/-2dB) for LTE 700, LTE FDD B12
LTE Features 3GPP Release 9	DL max. 10.2 Mbps, UL max. 5.2 Mbps UE CAT 1 supported
HSPA Features 3GPP Release 8	DL max. 7.2 Mbps, UL max. 5.7 Mbps HSDPA Cat.8 / HSUPA Cat.6 data rates Compressed mode (CM) supported according to 3GPP TS25.212
UMTS Features/ 3GPP Release 4	PS data rate – Max. 384 kbps DL / max. 384 kbps UL CS data rate – Max. 64 kbps DL / max. 64 kbps UL
SMS	Point-to-point MT and MO Cell broadcast Text and PDU mode Storage: SIM card plus SMS locations in mobile equipment

AT commands	Hayes 3GPP TS 27.007, TS 27.005, Gemalto M2M AT commands for RIL compatibility
SIM	SIM Application Toolkit: SAT letter classes b, c, e with BIP and RunAP support.
UICC	Support of 3 V and 1.8 V SIM/USIM cards
USB	USB 2.0 High Speed (480Mbit/s) device interface. Full Speed (12Mbit/s) compliant

GNSS (GPS & GLONASS) + option

Receiver Type	SiRFstarV - 52 channels, L1 frequency, C/A code GPS & QZSS:1575.42 MHz GLONASS: 1598.0625~1605.375 MHz
Horizontal Position Accuracy	< 2.5m (Autonomous) (50% 24 hr static, -130 dBm)
Velocity Accuracy	<0.01 m/s (speed, autonomous) <0.01° (heading) (50% @30m/s)
Time To First Fix	Autonomous (50% -130dBm) Hot start <1sec Warm start <30sec Cold start <35sec
Sensitivity (Autonomous)	Acquisition: -146 dBm (GPS) Tracking: -165 dBm (GPS), -163 dBm(GLONASS) Navigation: -160 dBm (GPS), -159 dBm(GLONASS) (-142dBm 28dB-Hz with 4dB noise figure)
Max. Update Rate	5 Hz
Max. Altitude	<18,000 m
Max. Velocity	<1,852 km/hr.
Protocol Support	NMEA V4.00, 115200 bps (default) GGA, GSA, GSV, RMC, VTG OSP (One Socket Protocol)

Navisys Technology Corp.

Tel : +886-3-5632598

Sales contact: sales@navisys.com.tw

Address: 2F, No.56, Park Ave. II, Science-Based Industrial Park, Hsinchu 300, Taiwan (R.O.C.)

<http://www.navisys.com.tw/>

Fax: +886-3-5632597

Technical support: service@navisys.com.tw

SBAS Support	WAAS, EGNOS, MSAS, GAGAN
Dynamics	<4g
Power Consumption	29 mA/average tracking

* **Note. According to IC Spec**



Windows Platform support

USB driver for Windows 7, 8, 10
RIL, USB driver for Embedded Handheld (Pocket PC and Smartphone) >= 6.x


Weight

WW-4162V	8.7 g
WW-4165V	9.0 g

Linux/Mac/Android Platform support

Compatible with standard USB kernel drivers
Android RIL driver support V4.x, V5.x, and V6.x

RF Connector: I-PEX Receptacle



Note. Corresponding plug cable: diameter of 1.13mm

Electrical Data


Power Supply (VCC)	3.3 ± 0.3 V
Power Consumption ^{&}	Without GPS
Airplane mode	80mA
Normal function mode ⁺	330mA

& The indicative data is for information purpose only.

Actual value depends on antenna efficiency, application environment, network etc.

+ Web browsing on a Win7 IPC.

Outlook

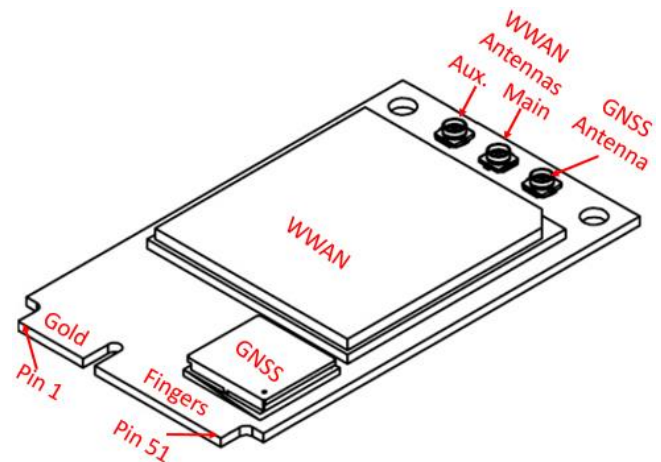

Environmental Data

Operating temperature (board temperature of ELS61-US)	-40 ~ 90 °C**: -30 ~ 85 °C (normal) -40 ~ -30 °C* (extended) 85 ~ 90 °C* (extended)
Operating temperature/ GNSS	-40 ~ 85 °C

* Occasional deviations from spec may occur

+ Airflow: min. 1 m/s

52-Pin Gold-Finger Definition

Mechanical Data

30 x 50.9 x 4.65 (mm)

NaviSys Technology Corp.

Tel : +886-3-5632598

Sales contact: sales@navisys.com.tw

Address: 2F, No.56, Park Ave. II, Science-Based Industrial Park, Hsinchu 300, Taiwan (R.O.C.)

<http://www.navisys.com.tw/>

Fax: +886-3-5632597

Technical support: service@navisys.com.tw

1	nWAKE	VCC	2
3	TXD	GND	4
5	RXD	NC	6
7	NC	SIM_VCC	8
9	GND	SIM_DATA	10
11	NC	SIM_CLK	12
13	NC	SIM_RESET	14
15	GND	NC	16
17	RTS	GND	18
19	CTS	nW_DISABLE	20
21	GND	nRESET	22
23	NC	VCC	24
25	NC	GND	26
27	GND	NC	28
29	GND	NC	30
31	NC	NC	32
33	NC	GND	34
35	GND	USB_DM	36
37	GND	USB_DP	38
39	VCC	GND	40
41	VCC	LED	42
43	GND	NC	44
45	NC	NC	46
47	NC	NC	48
49	NC	GND	50
51	NC	VCC	52

Name	PINs	Function	I/O
VCC	2,24,39,41,52	3.3V power supply, Min 3.0V, Max 3.6V	Input
GND	4,9,15,18,21,26,27,29,34,35,37,40,43,50	Ground	Input
USB_DM	36	USB data signal minus	I/O
USB_DP	38	USB data signal plus	I/O
LED	42	Open Drain active Low WWAN status indicator;	Output
SIM_VCC	8 [!]	Power for SIM card	Output
SIM_DATA	10 [!]	SIM data signal	I/O
SIM_CLK	12 [!]	SIM clock signal	Output
SIM_RESET	14 [!]	SIM reset signal	Output
nWAKE ^v	1	Open drain, active low wakeup signal	Output
nW_DISABLE	20	Active low radio control signal, internal pull-up	Input
nRESET ^v	22	Min 10ms active low reset signal,	Input
TXD [#]	3	UART/RS232 data into card	Input
RXD [#]	5	UART/RS232 data out of card	Output
RTS [#]	17	UART/RS232 request to send	Input
CTS [#]	19	UART/RS232 clear to send	Output
NC	Remaining pins	No connection	-

[!] Leave these pins open if they are not used

[&] Optional, default is NC

[#] Reserved pins used, proprietary

^v No connect (NC) for specified model

Order Information

WW-4162X (w/o GPS), WW-4165X (w/ GPS)

where X = Q, S, V, W as shown below

Feature \ Model	Q	S	V	W
USB	Y	Y	Y	Y
TTL/RS232	TTL	RS232	NC	NC
Pin 1 (nWAKE)	Y	Y	Y	NC
Pin 22 (nRST)	NC	NC	NC	NC

*This document is subject to change without notice.